

MONO


POLY



HELIENE

36^P

36-CELL POLYCRYSTALLINE MODULE

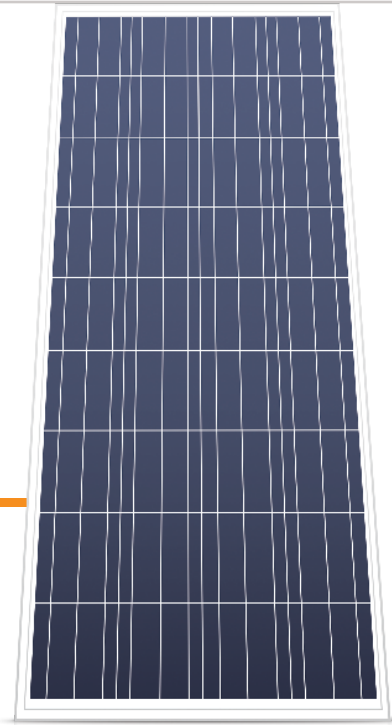

160 Wp

MAX POWER OUTPUT

16.0%

MODULE EFFICIENCY

10 YEAR

PRODUCT WARRANTY

25 YEAR

LINEAR PERFORMANCE GUARANTEE



GUARANTEED POSITIVE POWER SORTING: [-0 : +4.99 WP]



CERTIFIED FOR USE IN CLASS 1 DIVISION 2 HAZARDOUS LOCATIONS (GROUP A,B,C & D)



MANUFACTURED ACCORDING TO INTERNATIONAL QUALITY SYSTEM STANDARDS: ISO9001



40mm DOUBLE WEBBED FRAME ENSURES ROBUST AND RIGID PRODUCT FOR ALL INSTALLATION TYPES


HELIENE IS A PREMIER SOLAR MODULE MANUFACTURER, SERVICING THE GROWING SOLAR ENERGY MARKETS OF NORTH AMERICA.

COMBINING PROVEN EUROPEAN TECHNOLOGY WITH NORTH AMERICAN INGENUITY ALLOWS HELIENE TO MAKE A REAL COMMITMENT IN PROVIDING SMARTER ENERGY CHOICES FOR THE FUTURE.


HELIENE
www.heliene.com

LINEAR PERFORMANCE GUARANTEE



10 YEAR WORKMANSHIP WARRANTY • 25 YEAR LINEAR PERFORMANCE GUARANTEE

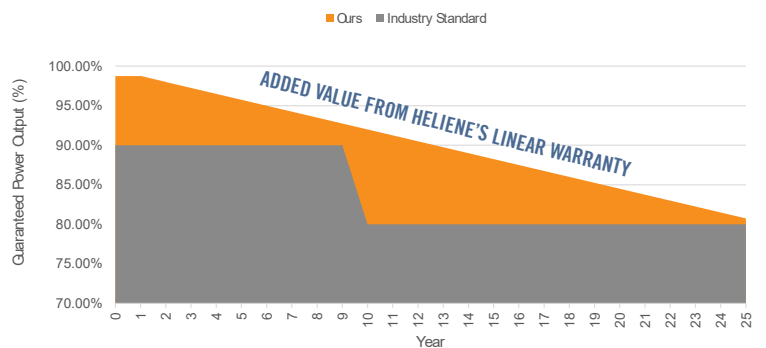

DIMENSIONS FOR HELIENE 36P SERIES MODULES

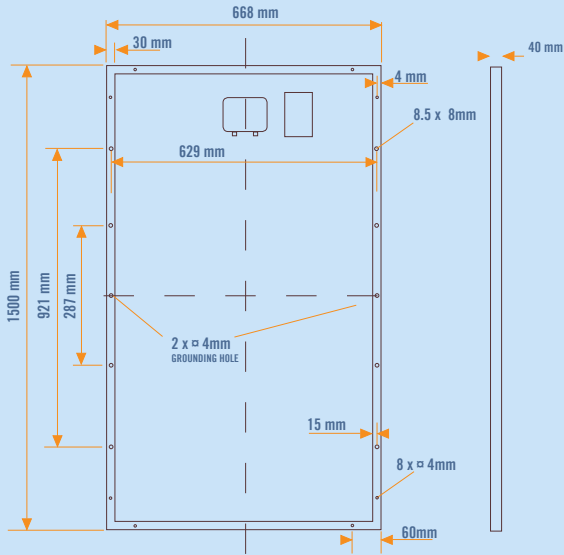

I-V CURVE FOR HELIENE 36P SERIES

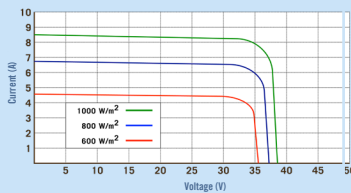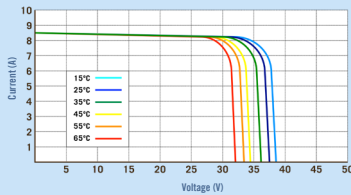

CERTIFICATIONS



ELECTRICAL DATA (STC)

Peak Rated Power	P_{mpp} (W)	160	155	150	145
Maximum Power Voltage	V_{mpp} (V)	19.00	18.73	18.46	18.19
Maximum Power Current	I_{mpp} (A)	8.59	8.43	8.27	8.11
Open Circuit Voltage	V_{oc} (V)	22.77	22.49	22.21	21.93
Short Circuit Current	I_{sc} (A)	9.26	9.10	8.94	8.78
Module Efficiency *	Eff (%)	16.0	15.5	15.0	14.5
Maximum Fuse Rating	MF (A)	15	15	15	15
Power Output Tolerance		[- 0 , + 4.99] Wp			

STC - Standard Test Conditions: Irradiation 1000 W/m² - Air mass AM 1.5 - Cell temperature 25 °C
 * Calculated using maximum power based on full positive output tolerance [-0 , +4.99] Wp

MECHANICAL DATA

Dimensions (L x W x D)	1500 x 668 x 40 mm (59 x 26.3 x 1.6 inch)
Weight	14.5 kg (32 lbs)
Output Cables	*Optional
Junction Box * (*Optional: Class 1 Div 2 Rated)	IP65; 4 Terminal Screw Block; Terminals Compatible with 8 - 14 AWG Wire Compatible with PG 13.5 Cable Gland, M20 13mm (½") Conduit, or Other Cable Fittings for 6-12 mm ² Cable
Frame	Double webbed 15 micron anodized aluminum alloy
Front Glass	Low-iron content, high-transmission PV solar glass
Solar Cells	36 Polycrystalline cells (156 x 156 mm)

* Standard IP67 Junction Box with 800mm cables, Class 1 Div 2 Certification not applicable with this option

CERTIFICATIONS

UL Listed	ULC/ORD-C1703-1, UL1703
IEC Listed	Optional

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	+45°C (±2°C)
Temperature Coefficient of P_{max}	-0.43%/°C
Temperature Coefficient of V_{oc}	-0.32%/°C
Temperature Coefficient of I_{sc}	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40°C - +85°C
Max System Voltage	600V

WARRANTY

10 Year Manufacturer's Workmanship Warranty
25 Year Linear Power Guarantee

(Refer to product warranty page for details)

PACKAGING CONFIGURATION

Modules per box:	20 pieces
Modules per 53' trailer:	1200 pieces